
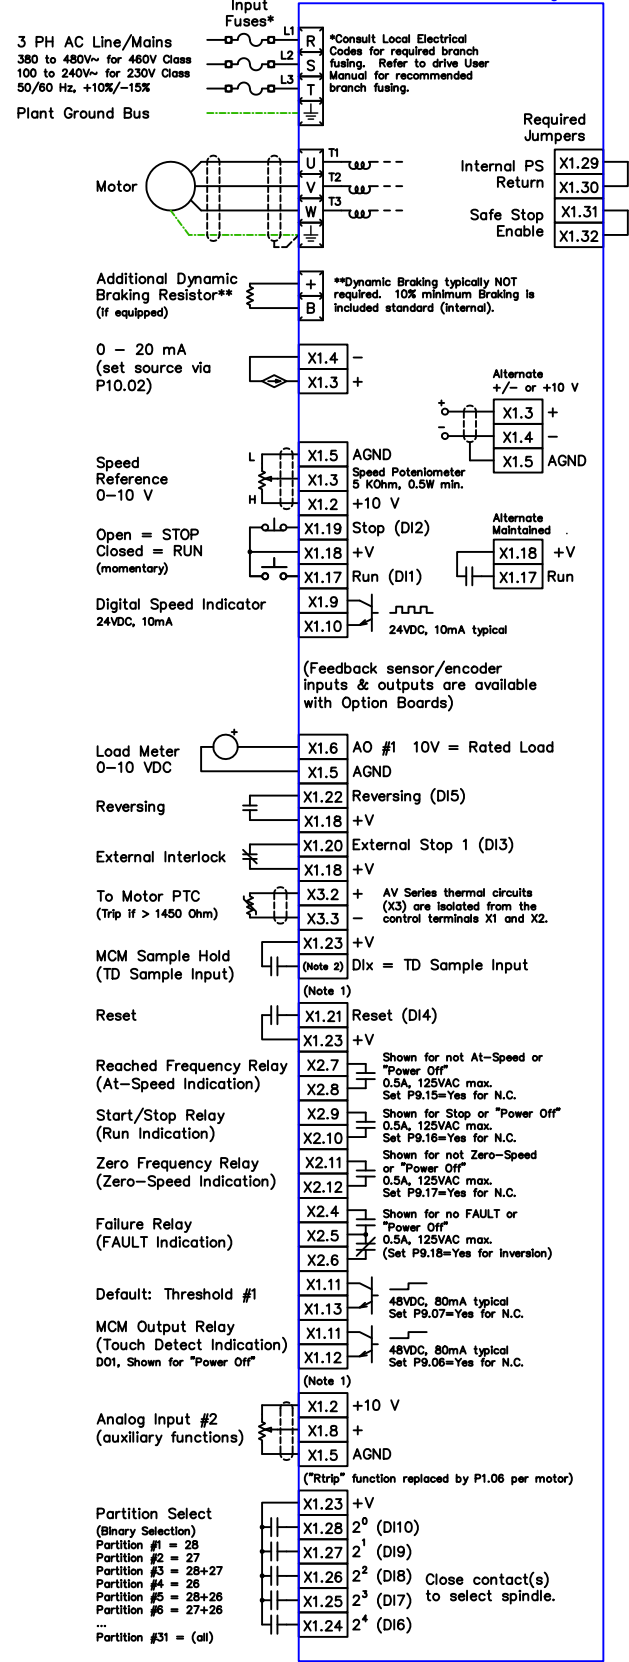


Acomel K3000
Typical Connection Diagram

SPINDEL AV Series Cross
Reference Connection Diagram

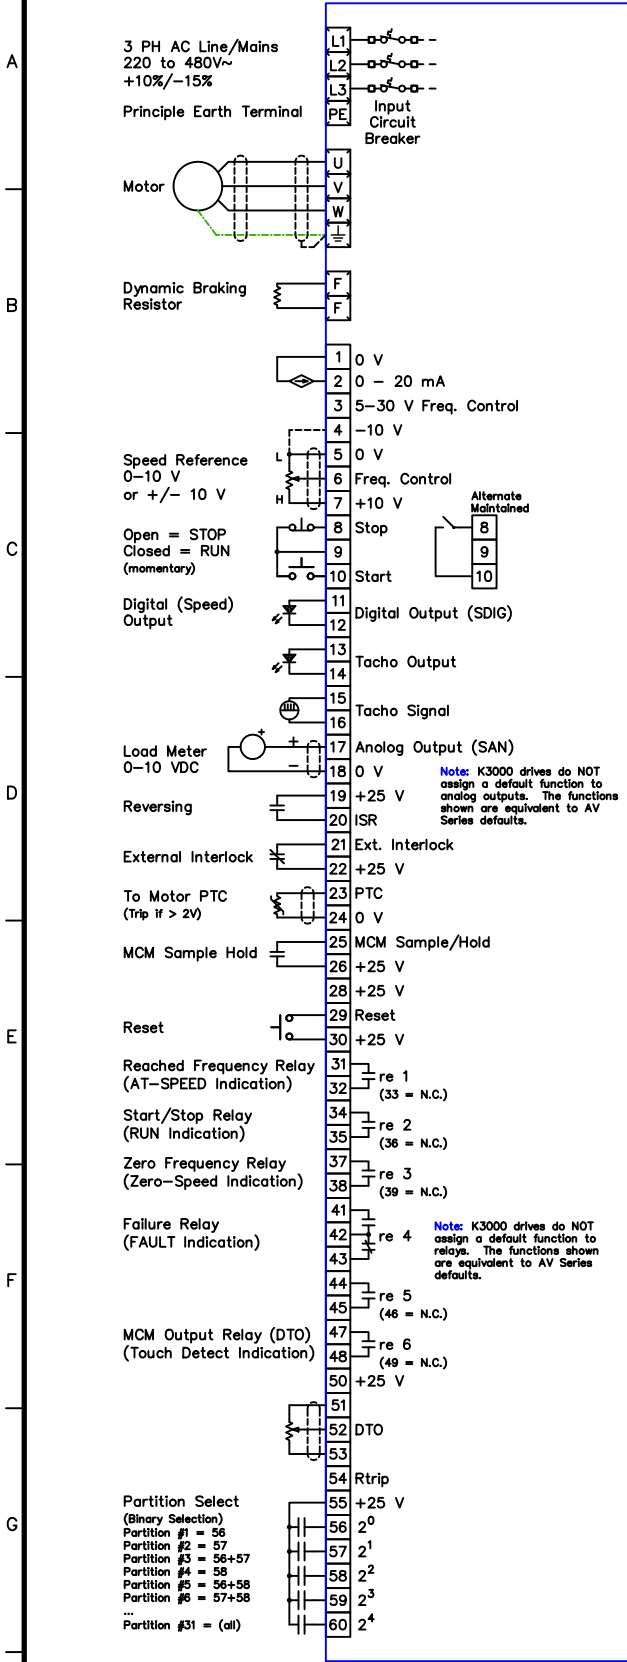

Programming Note: SPINDEL AV Series Drives are highly programmable. The terminal functions shown in this cross reference assume all drive parameters have been set to their default value (via the "Control Panel" Menu) and then the following parameters are programmed as indicated:

- P6.08, External Stop 1 Type Select = Coast to Stop
- P7.02, Motor Selection Source = X1 Motor Code
- P8.01, Digital Input X1.17 (DI1) Select = Run Momentary
- P8.02, Digital Input X1.19 (DI2) Select = Stop/Interlock
- P8.03, Digital Input X1.20 (DI3) Select = External Stop 1
- P8.05, Digital Input X1.22 (DI5) Select = Reversing
- P11.03, Analog Output #1 100% Value = 10.00

In addition to the above, the motor parameters in Group 1 must also be programmed for each motor used.

Note 1: X1.18, X1.23 and X2.3 (+V) are used as an internal source for digital inputs.

Note 2: Ten (10) programmable inputs (DI1-DI10) are available for input functions. An unused input should be used for these functions.

SPINDEL Electronics
4517 Broadmoor Avenue SE
Grand Rapids, MI 49512
TEL +1 616 554 2200
FAX +1 616 554 2033

Date: 28 May 13
 Drawn By: KLG
 Date: 10 May 19
 Checked By: OMM

Title: **K3000 Series to SPINDEL AV Series Connection Cross Reference**

Scale: A* (Scaled 1:1.575)

Drawing No.: 81134-0

Sheet: 1 of 1